


C-380 SHACKLE REPLACEMENT

Place tape on both sides of car to stop it from sliding. Remove all 6 bolts from top plate.



Remove top plate. Be careful not to lose nylon washer between top plate and car. Remove pin. Replace shackle and reinsert pin. Bolt top plate back to car.

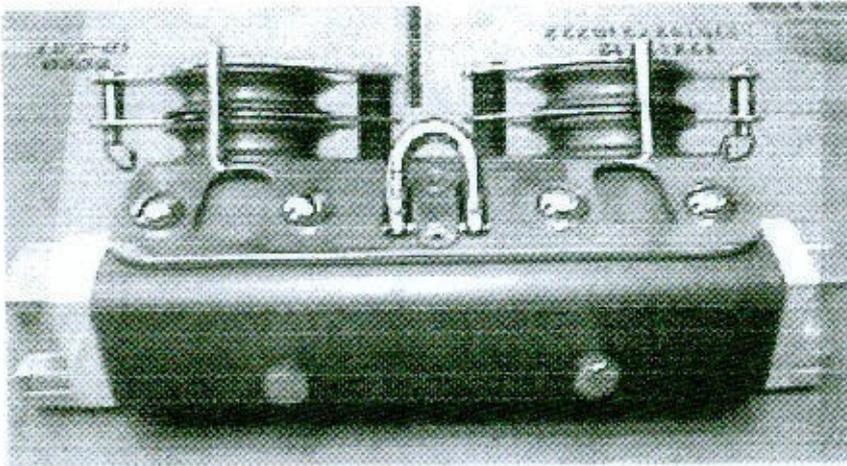